




Zylinder Typ	Durchmesser					Hub	Zylinder Abmessungen						Max. Kugeltragkraft (T)	Vol. (ltr.)	Kardanring-ausführung	Gewicht kg	Bestellnummer
	Ø T1	Ø T2	Ø T3	Ø T4	Ø T5		B	C	D	E	G	Y					
3-stufig	45	61	76			570	45	115	45	293	95	143	8	2,5	1	17,0	415864.001
3-stufig	45	61	76			730	40	128	40	348	95	180	8	3,0	1	19,0	415865.001
3-stufig	45	61	76			912	45	115	45	409	95	143	8	3,6	1	22,0	415866.001
3-stufig	45	61	76			1030	40	128	40	449	95	180	8	4,0	1	23,0	415867.001
4-stufig	45	61	76	91		726	40	128	40	293	108	146	8	3,1	1	19,0	415868.001
4-stufig	45	61	76	91		945	40	128	40	348	108	186	8	5,0	1	22,0	415869.001
4-stufig	45	61	76	91		1190	45	128	45	409	108	146	8	6,5	1	26,0	415870.001
5-stufig	45	61	76	91	107	875	45	148	45	288	128	186	8	5,2	2	26,5	415871.001
5-stufig	45	61	76	91	107	1150	45	148	45	343	128	186	8	7,7	2	30,0	415872.001
5-stufig	45	61	76	91	107	1475	45	148	45	424	128	139	8	9,9	2	34,5	415873.001

Einbaubeispiel eines hydraulischen Teleskopzylinders

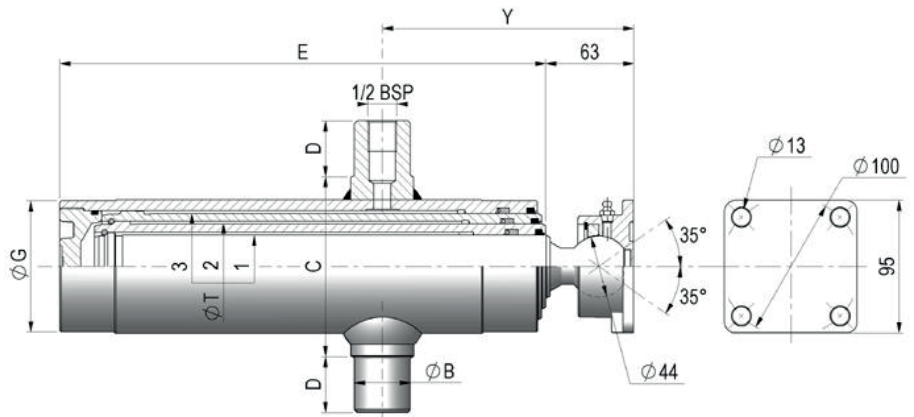