


# Newsletter

07.2021

Knott K27 Couplings


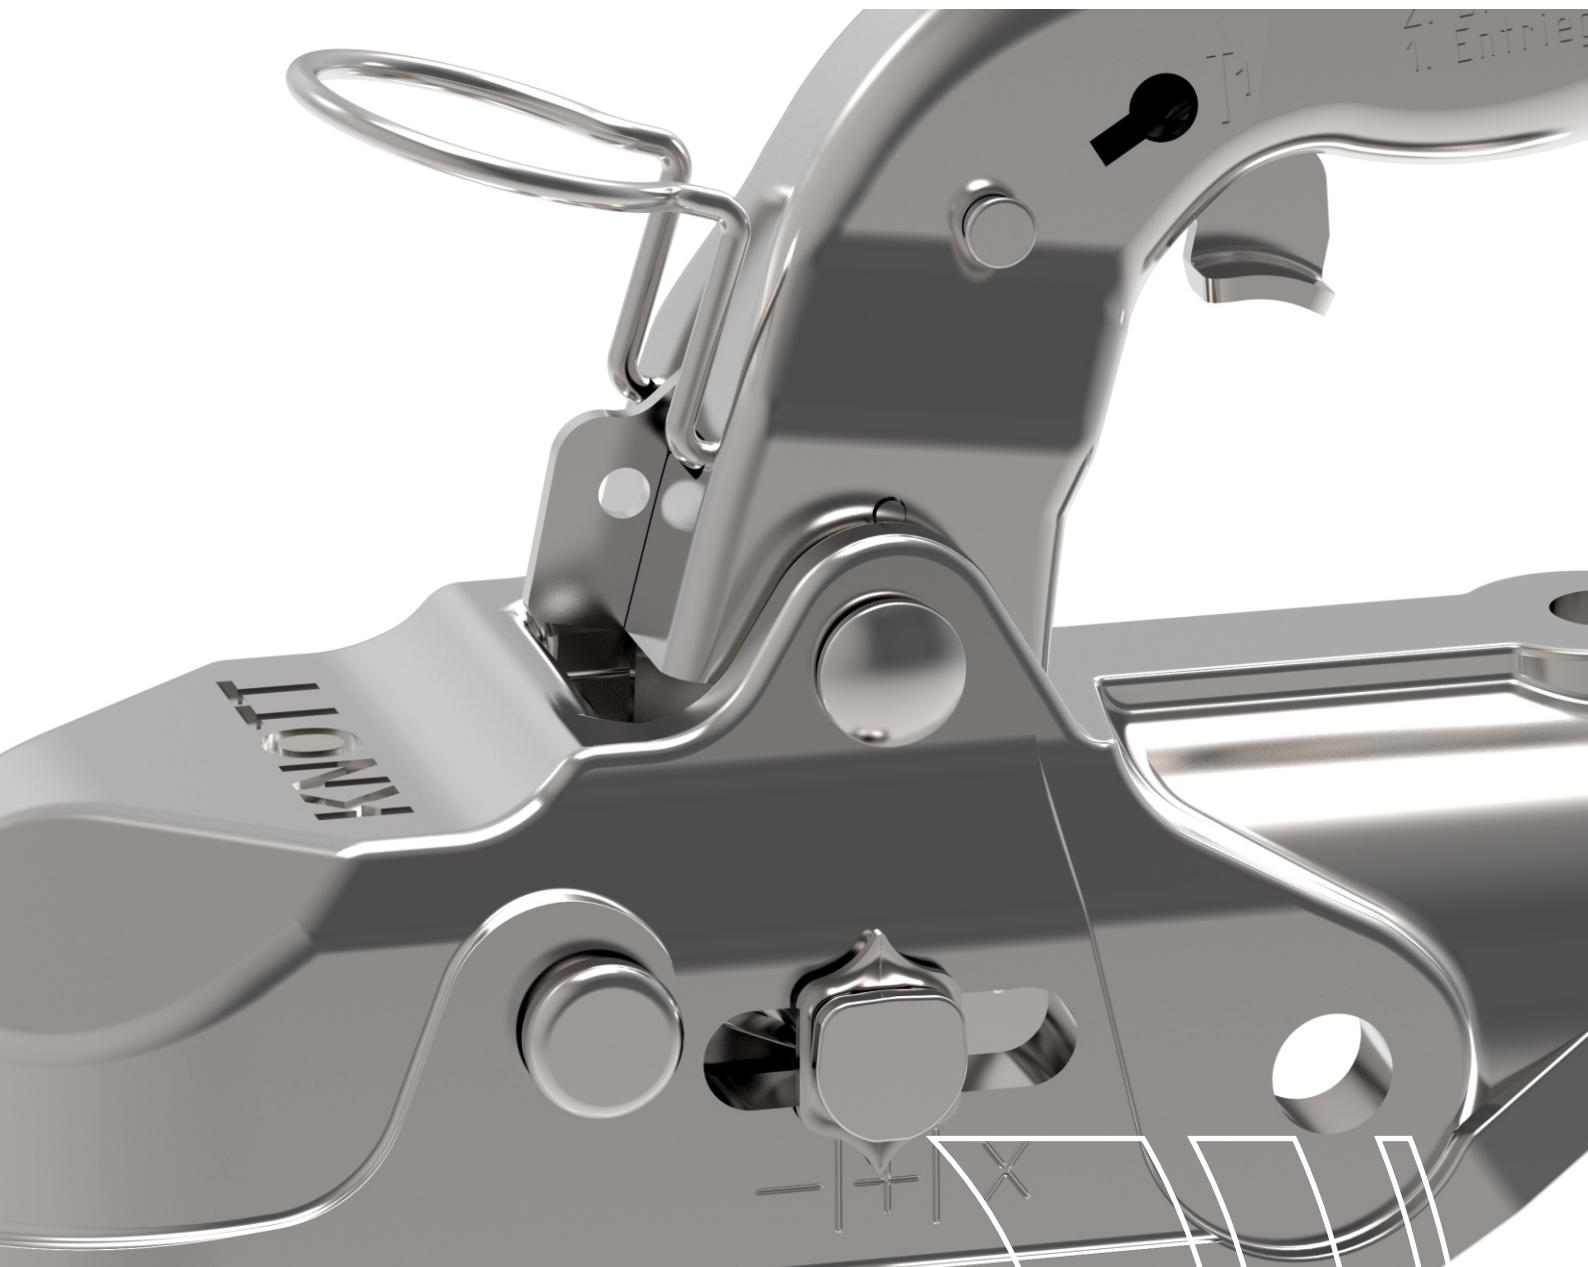


knott.pl


Dear Sirs,

We would like to inform you that the K27 coupling head has been modified and tested by a certification body so that increased was permissible vertical load on the ball to 250kg.

The introduced de-identification is connected with the change of the approval number, which results from the new provisions introduced in the ECE R55 regulation (version 02).

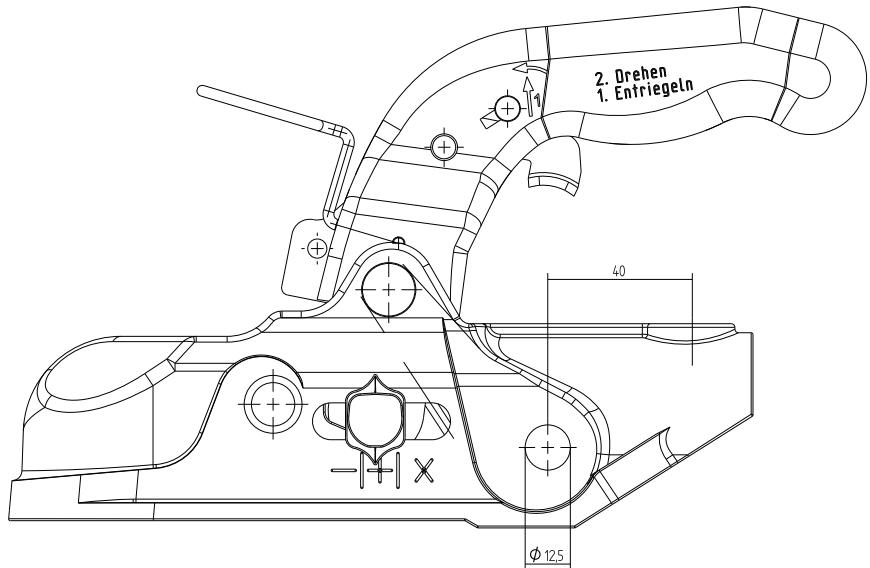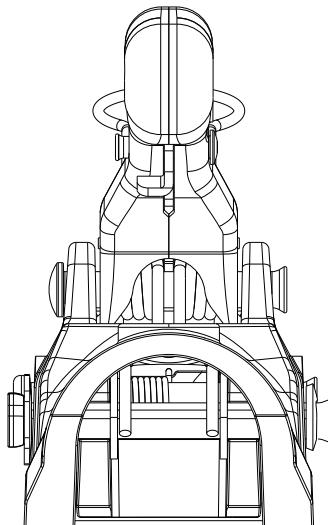

**K27-A  
S-250kg**

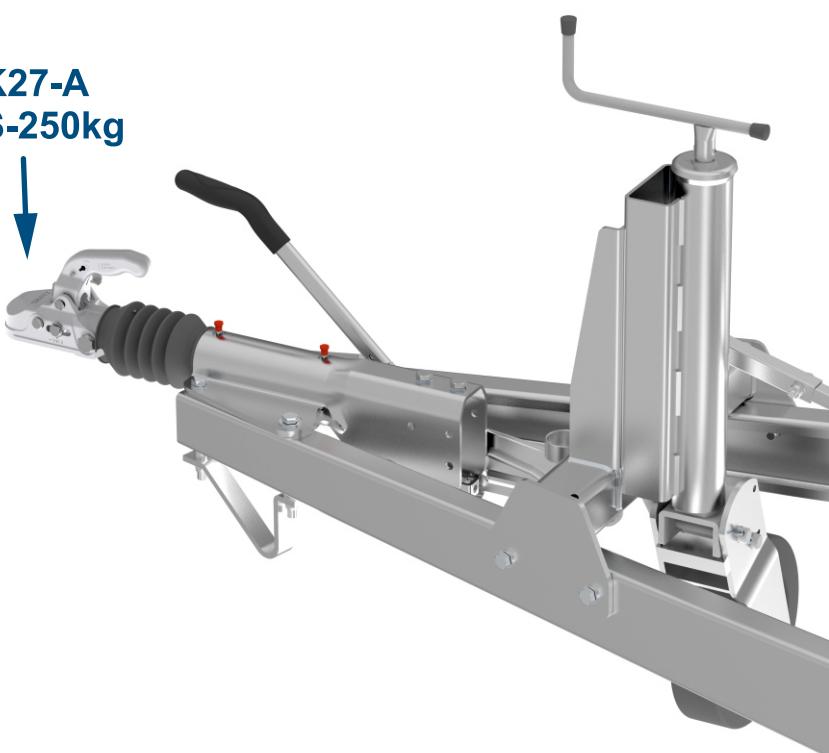

The K27 coupling head is adapted to work with overrun devices with a slider diameter of 50mm and 45mm. Attaching to the breech by means of bolts M12 / M12

The coupling head is equipped with an indicator of wear and proper fastening, thanks to which we can easily obtain information whether driving with a trailer is safe or whether the hitch should be replaced with a new one.

K27 coupling heads are now characterized by the permissible pressure on the S-250 kg ball.

**In connection with the change, the approval number also changes, and thus it will require you to take into account the discussed change in the FTL approval.**

All information and details are available from the sales representatives who support you.



E1 55R-02 2122  
B50X S-250kg  
D/DC 25.00  
DMC 2700kg



The coupling head can be mounted on all overrun devices with a slider with a nominal diameter of 50mm and a nominal diameter of 45mm, i.e. on any overrun device equipped with such sliders offered by our company, but also on overrun devices offered by the competition.

Art. Nr	Type	mounting bolts	S
6E0019.004	K27-A	M12/M12	200 kg
6E0019.002	K27-A	M14/M14	250 kg
6E0019.008	K27-B	M12/M12	250 kg

Plug holder  
as an option



Detailed information about the products is provided by the Trade Department of KNOTT Sp. z o.o.

**KNOTT Sp. z o.o.**

63-011 Pławce  
Zdziechowice 100  
tel. 61 287 60 00  
fax 61 287 60 01  
info@knott.pl  
[www.knott.pl](http://www.knott.pl)

